


FLAT TOP

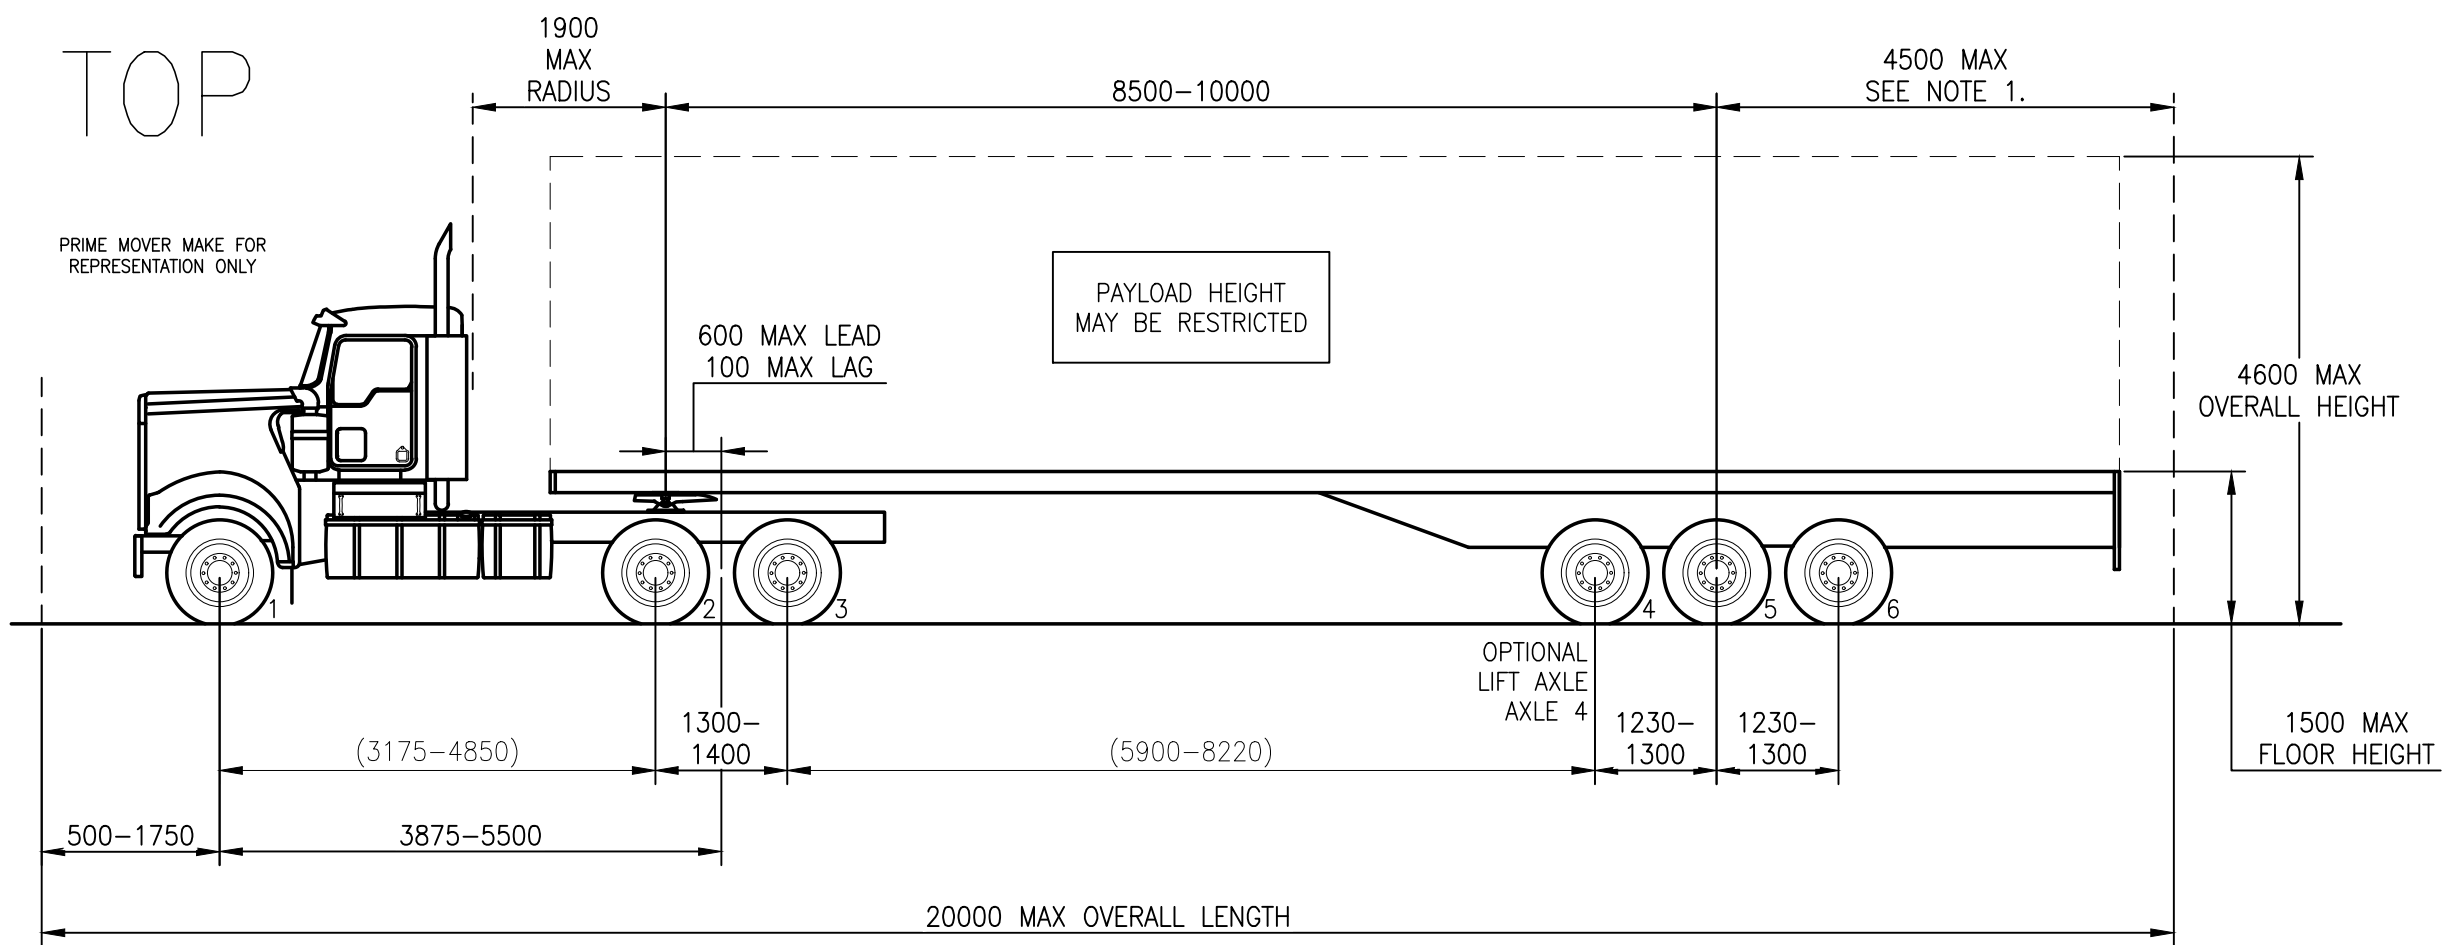

DRAFT

CAP 45.5/46.0 HML L1 TIER 1
 CAP 44.0/44.5 CML L1 TIER 1
 TOT 42.5/43.0 GML L1 TIER 1

	MINIMUM LOAD RATING	SMALLEST TYRE SIZE
STEER	144	11R22.5
DRIVE	140	275/70R22.5
TRAILER	136	265/70R19.5

PRIME MOVER	8.5
TRAILER	5.5

- NOTES:
1. TRAILER REAR OVERHANG CANNOT EXCEED 60% OF TRAILER S-DIMENSION
 2. ELIGIBLE VEHICLES MUST COMPLY WITH TIER 1 MASS LIMITS.

						T: (03) 9438 6790 E: contact@advantia.com.au W: www.advantia.com.au	
				TITLE 20M PRIME MOVER AND SEMI-TRAILER (1-2-3) – VEHICLE SPECIFICATION ENVELOPE			
				ALL DIMENSIONS IN MM. TOLERANCES: THE LESSER OF ±20 OR ±1% UNLESS OTHERWISE SPECIFIED. VERTICAL DIMENSIONS ARE MEASURED IN LADEN CONDITION. CERTIFIERS MAY ADD 20MM FOR UNLADEN CONDITION.		SHEET 1 OF 3 SCALE NTS SIZE A3	
				CLIENT ADVANTIA TRANSPORT CONSULTING		DWG NO. ATC3214-L-01	
				REV. A DRAFT RELEASE		REV. A	
				SLW SDT 23 FEB 2024 DRN. APPR. DATE			