


# DROP DECK

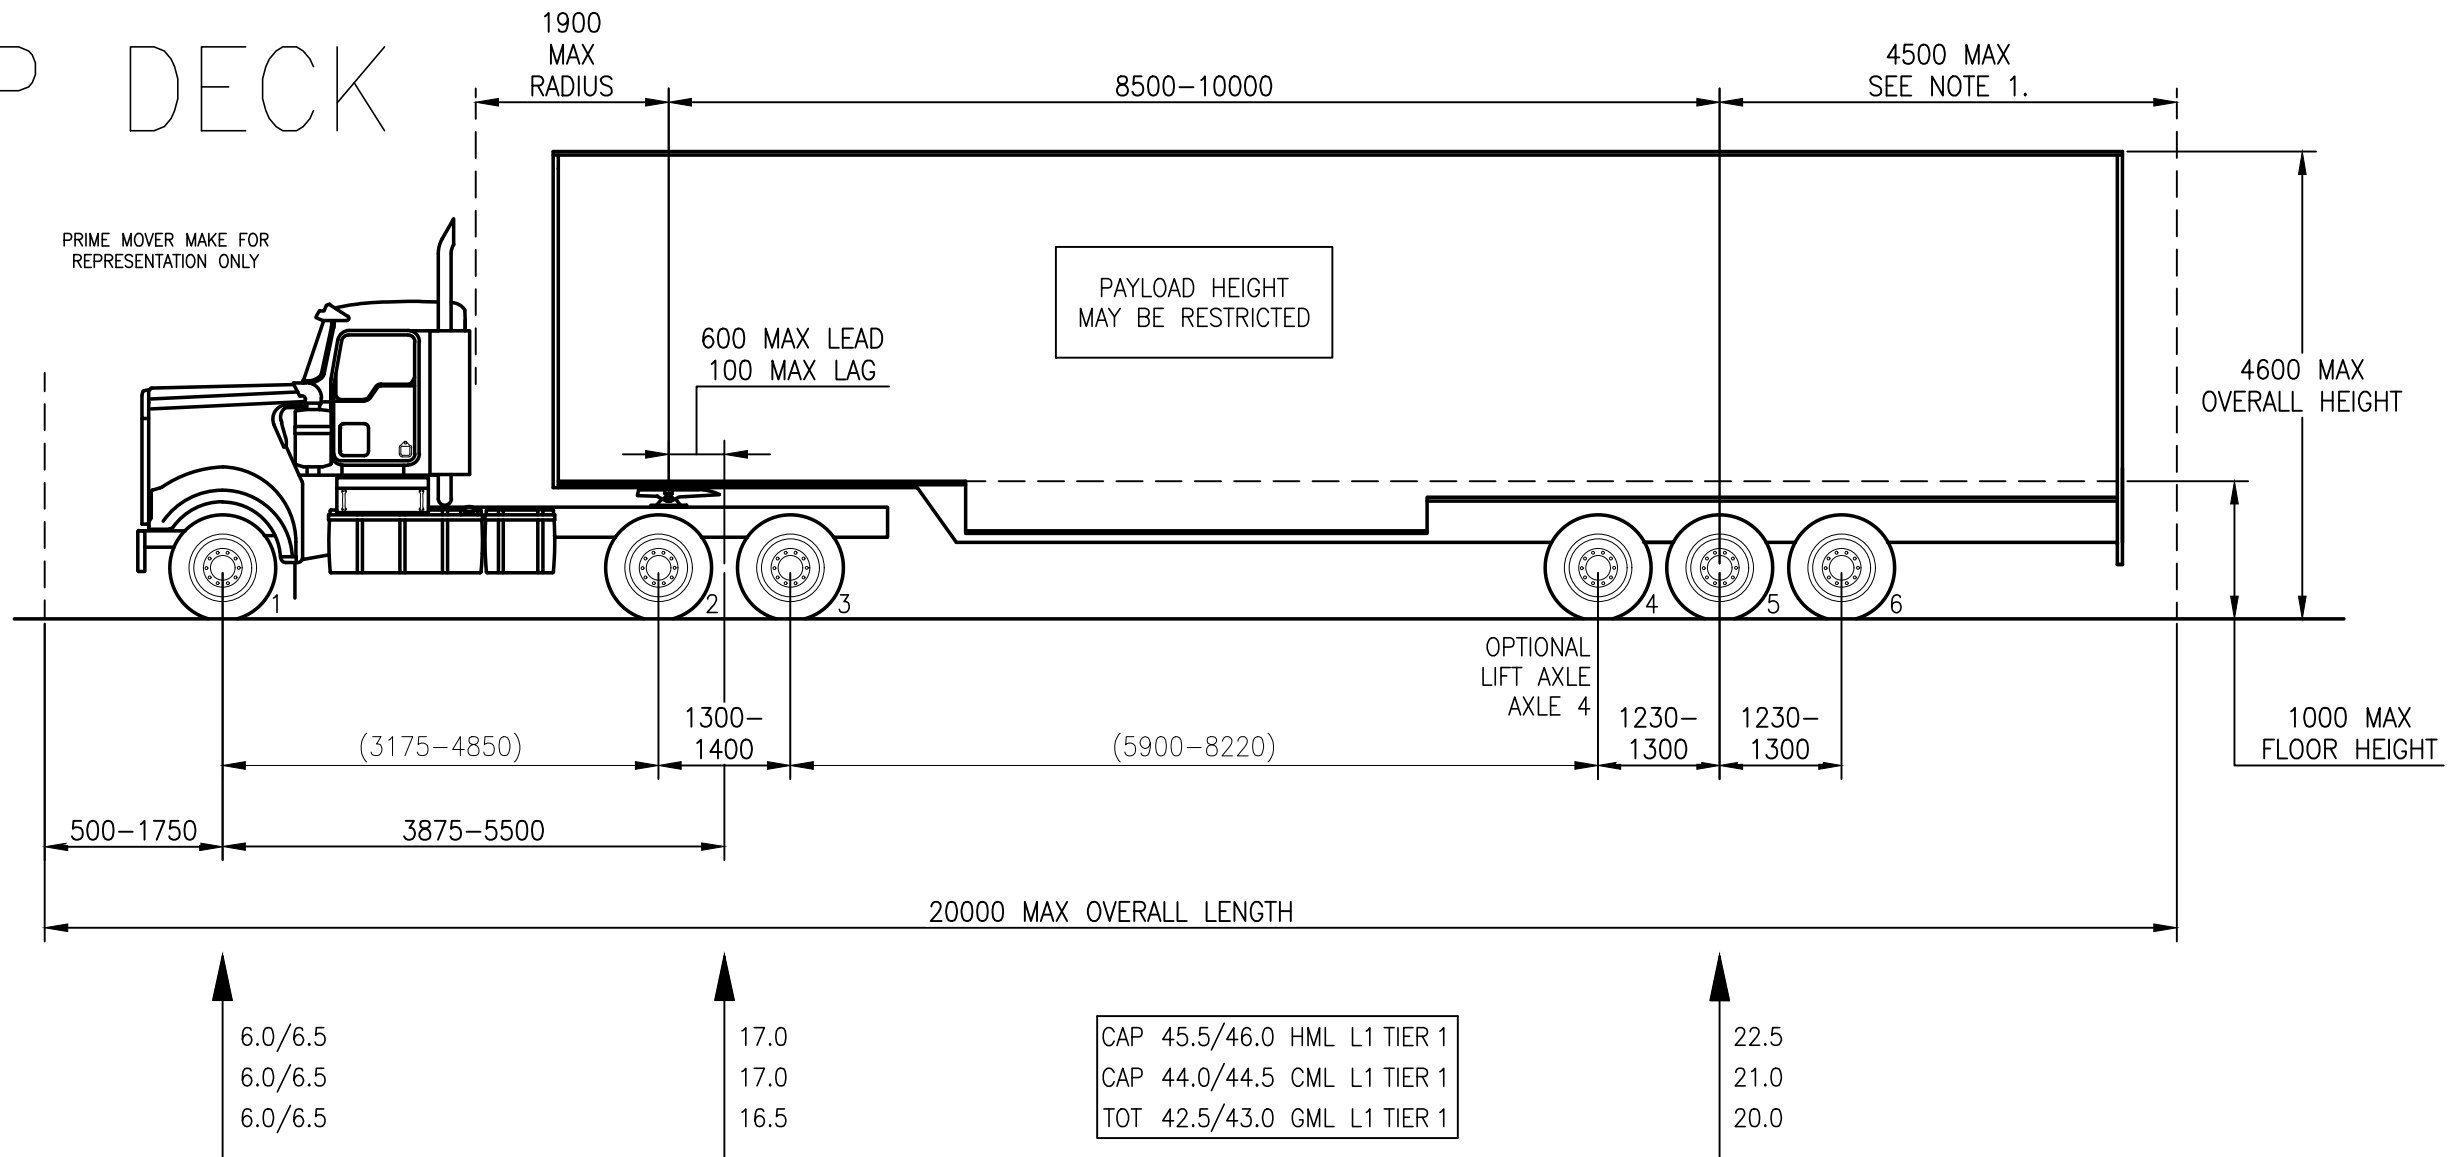

# DRAFT

CAP	45.5/46.0	HML	L1	TIER 1
CAP	44.0/44.5	CML	L1	TIER 1
TOT	42.5/43.0	GML	L1	TIER 1

	MINIMUM LOAD RATING	SMALLEST TYRE SIZE
STEER	144	11R22.5
DRIVE	140	275/70R22.5
TRAILER	136	265/70R19.5

PRIME MOVER	8.5
TRAILER	5.5

**NOTES:**

1. TRAILER REAR OVERHANG CANNOT EXCEED 60% OF TRAILER S-DIMENSION
2. ELIGIBLE VEHICLES MUST COMPLY WITH TIER 1 MASS LIMITS.

						T: (03) 9438 6790 E: contact@advantia.com.au W: www.advantia.com.au	
				TITLE 20M PRIME MOVER AND SEMI-TRAILER (1-2-3) – VEHICLE SPECIFICATION ENVELOPE			
				ALL DIMENSIONS IN MM. TOLERANCES: THE LESSER OF ±20 OR ±1% UNLESS OTHERWISE SPECIFIED. VERTICAL DIMENSIONS ARE MEASURED IN LADEN CONDITION. CERTIFIERS MAY ADD 20MM FOR UNLADEN CONDITION.		SHEET 3 OF 3 SCALE NTS SIZE A3	
				CLIENT ADVANTIA TRANSPORT CONSULTING		REV. A	
				DWG NO. ATC3214-L-01			
REV.	DESCRIPTION	DRN.	APPR.	DATE			
A	DRAFT RELEASE	SLW	SDT	23 FEB 2024			